AITTAL

4F Series



Product feature


- 1. The aluminum foot pedal is designed with direct acting, which is steady and reliable.
- If the duration of direction-change is long, the valves with lock may be selected.
- The clamping framework is steady and reliable that it is easy and quick to unlock. However, with the limitation of the dimension of structure, it can not bear frequent strong impact.
- 4. Plastic guard with high strength may be selected.

Specification


Model	4F210-08	4F210-08L	4F210-08F	4F210-08LF			
Fluid	Air (to be filtered by 40 μm filter element)						
Operating	Acting type controlled by foot						
Port size [Note1]	1/4"						
Valve type	5/2 Way						
Pressure range	0~1.0MPa(0~145psi)						
Proof pressure	1.5MPa(215psi)						
Temperature	-20~70°C						
Material of body	Aluminum alloy						
Lubrication	Not required						

[Note1] G thread is available.

Ordering code

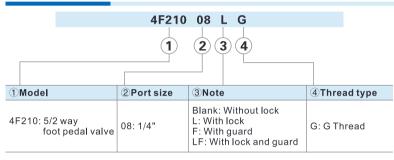

Inner structure

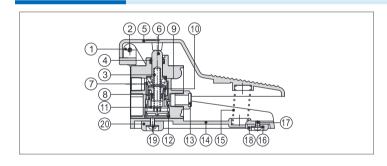

No.	Item	No.	Item	No.	Item	No.	Item
1	Pin	6	Spool	11	Bottom cover	16	Washer
2	Screw	7	O-ring	12	C clip	17	Screw
3	Spring	8	O-ring	13	Silencer	18	Base pad
4	E clip	9	Front cover	14	Base	19	Screw
5	Pedal	10	Piston	15	Pedal spring	20	Base pad



Lockable type should be added grease periodically to ensure the lock mechanism can work regularly.

Dimensions

