


Limit switches

XC Standard range, format EN 50041

Plastic, double insulated, XCKS

Variable composition

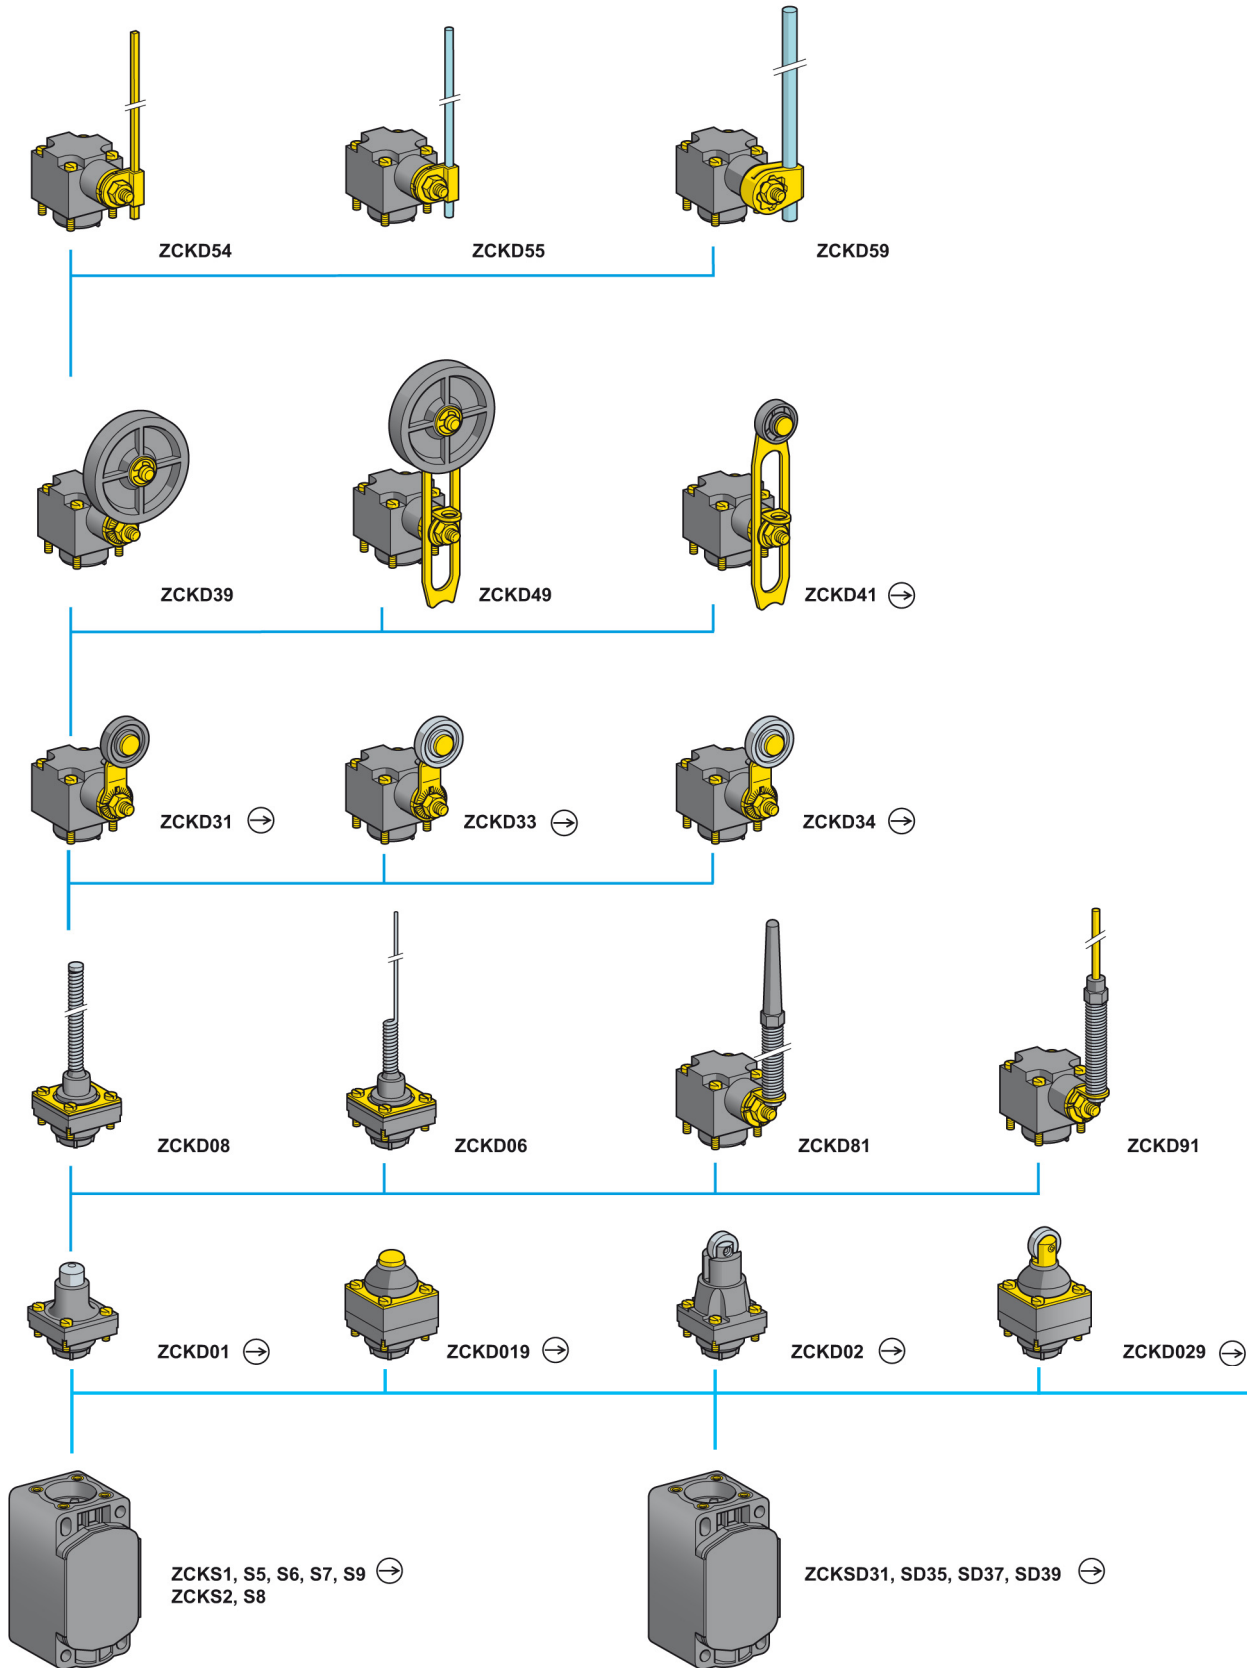


(1) For further details see page 141. For a cable entry tapped ISO M20 x 1.5, add H29 to the reference.
Example: ZCKS1 becomes ZCKS1H29.



(2) Adjustable throughout 360° in 5° steps, or in 90° steps by reversing the notched washer.

(3) Adjustable throughout 360° in 5° steps, or in 45° steps by reversing the lever mounting.

Note: ZCKD heads can only be used with ZCKS bodies.

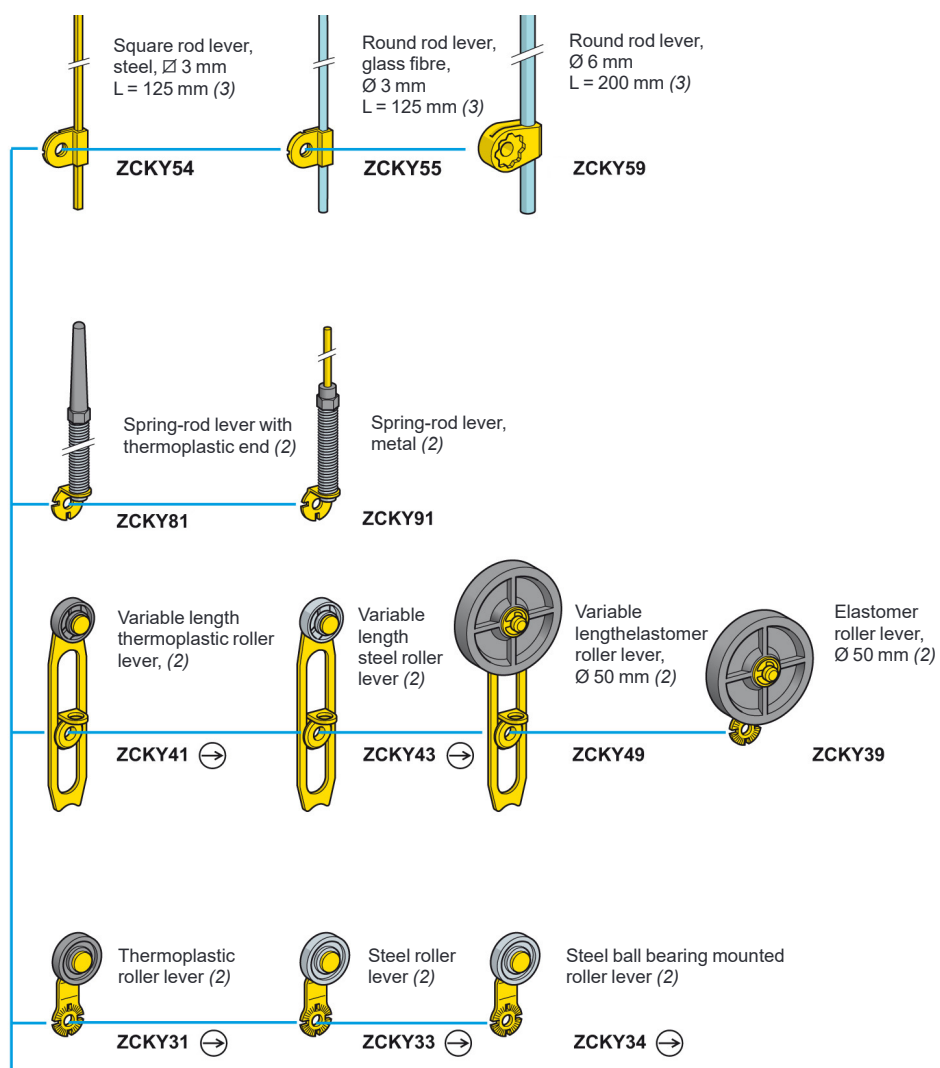

For actuation from left AND right or from left OR right



Body with double-pole 2 CO, staggered, snap action contact cable entry for Pg 13.5
2 step, 1 from left AND 1 from right (1)